

Fig. 380/550 PN40

Filtre à tamis


- Corps "Y"
- Tout inox
- Pour eau, vapeur et agents agressifs

"Y" type Strainer

- Stainless steel
- For water, steam, thermic fluid and aggressive medium

"Y" Form Schmutzfänger

- Edelstahl
- Für Wasser, Gas, Dampf und aggressive Flüssigkeiten

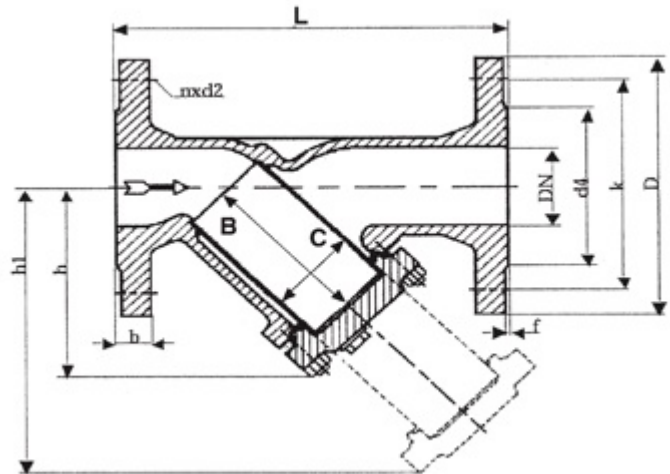

Dimensions selon la Norme EN 558-1 série 1
 Length according to EN 558-1 series 1
 Baulänge nach EN 558-1 Grundreihe 1

DN	L	D	K	d4	h	h ₁	n	d2	b	f	Joint – Gasket			Tamis/Screen			Poids
											Corps/Chapeau Body/Cover			Perfo.	B	C	Weight
											DN ext	DN int	Ep.				
mm																	kg
15	130	95	65	45	70	89	4	14	16	2	40	28	1,5	0,6	48	12	3,0
20	150	105	75	58	78	110	4	14	18	2	45	33	1,5	0,6	55	26	3,5
25	160	115	85	68	85	115	4	14	18	2	52	38	1,5	0,8	63	32	5,0
32	180	140	100	78	100	135	4	18	18	2	59	45	1,5	0,8	74	39	7,5
40	200	150	110	88	125	170	4	18	18	3	75	55	1,5	0,8	94	45	9,5
50	230	165	125	102	135	190	4	18	20	3	87	66	1,5	0,8	105	55	13,0
65	290	185	145	122	170	235	8	18	22	3	108	81	2	0,8	142	73	23,0
80	310	200	160	138	190	280	8	18	24	3	124	95	2	1,2	157	87	27,0
100	350	235	190	162	230	320	8	22	24	3	135	105	2	1,2	168	98	40,5
125	400	270	220	188	280	410	8	26	26	3	183	152	2	1,2	196	125	56,0
150	480	300	250	218	340	480	8	26	28	3	193	156	2	1,2	262	144	87,5

Conditions de service / Working conditions / Betriebsdruck und Temperatur

Température (°C)	0	100	200	300
Pression / Pressure / Druck (bar)	40	32	35	21

Matières / Materials / Material

Corps : Inox 316 (X5CrNimo19112)
Chapeau : Inox 316 (X5CrNimo19112)
Tamis : Inox 304 (X5CrNimo17122)
Etanchéité corps/chapeau : Graphite

Body : Stainless steel (316)
Cover : Stainless steel (316)
Screen : Stainless steel (304)
Gasket between body/cover : Graphite

Gehäuse : 1.4408
Deckel : 1.4408
Sieb : 1.4401
Dichtung : Graphit

04-2013



ROBINETTERIE INDUSTRIELLE
 30 rue Henri Durre - 59590 RAISMES
 Tél. 33 (0)3 27 36 70 12 - Fax 33 (0)3 27 36 75 20

CE PED 97/23



www.stemat-jansen.fr

Document non contractuel